

Olefin Production from Heavy Liquid Hydrocarbon Thermal Cracking: Kinetics and Product Distribution

Sedighi, Mehdi; Keyvanloo, Kamyar; Towfighi Darian, Jafar⁺*

Faculty of Chemical Engineering, Tarbiat Modares University,

P.O. Box14115-143 Tehran, I.R. IRAN

ABSTRACT: Thermal cracking of a heavy liquid hydrocarbon was performed in a laboratory scale tubular reactor. Central Composite Design (CCD), was used as an experimental design method. The design variables were Coil Outlet Temperature (COT), feed flow and rate steam ratio. Maximum yield of ethylene was 30.37 wt% at COT, residence time and steam ratio of 869°C, 0.208 s and 1.22 g/g, respectively. Maximum yield of propylene was 15.37 wt% at COT, residence time and steam ratio of 825°C, 0.147 s and 0.95 g/g, respectively. A mechanistic model based on free radical chain reactions was developed using experimental results. Developed reaction network contains 148 reactions for 43 species. Finally, the experimental data were compared with model results. Scatter diagrams showed good agreement between model and experimental data.

KEY WORDS: Thermal cracking, Heavy liquid hydrocarbon, Kinetic model.

INTRODUCTION

Steam cracking of various hydrocarbons is the major route for production of light olefins, ethylene and propylene, which are basic feedstocks for the petrochemical industries. Steam is used in this process to increase the olefin selectivity and decrease coke formation rate. The mixed hydrocarbon and steam are heated to primary cracking temperature (500 - 650°C). Then, it is cracked in fired tubular reactor where the reactions take place at higher temperatures.

Free-radical chain reactions are accepted as reaction mechanism of hydrocarbon thermal cracking [1]. The increase in prices of lighter hydrocarbons has brought about the

tendency to the heavier hydrocarbon such as gasoil and residue as feedstocks for olefin production.

Thermal cracking of atmospheric gasoil was carried out by Hirato *et al.* [2]. Then, molecular-based model was developed. They also used the modified model for modeling of thermal cracking of naphtha and kerosene. Belohlav *et al.* [3] developed a model of pyrolysis of ethane, petroleum gases, and primary naphthas involve free radical reactions. The kinetic model optimization and verification was performed by the experimental set. Thermal cracking of kerosene for producing ethylene and propylene has been studied in an experimental setup

* To whom correspondence should be addressed.

+ E-mail: towfighi@modares.ac.ir

1021-9986/10/4/135

13/\$/3.30

by Ghassabzadeh *et al.* [4]. An applicable kinetic model was developed to predict yield distribution of products of the kerosene thermal cracking. Therefore, a reaction mechanism is generated on the basis of major reactions classes in the pyrolysis and feed compounds using some simplification assumptions in the model. Zahedi *et al.* [5] studied the thermal cracking of atmospheric gas oil. The obtained maximum yield of ethylene was equal to 30.9 wt% as well as the maximum yield of propylene was 12.2wt%. A mechanistic model was developed based on experimental data. Depeyre *et al.* [6] studied the effects of temperature, steam to gas oil ratio and residence time on major products in gas oil thermal cracking. The best yield of ethylene, 27% in mass, was obtained in the quartz reactor at 770 °C, residence time of 0.6 s, and mass ratio of steam to gas oil equal to 1. Keyvanloo *et al.* [7] studied the effect of main parameters and their quadratic and cubic interactions on the yield of light olefins in thermal cracking of naphtha by statistical design of experiments. They have found that the higher interactions should be considered in the modeling of naphtha steam cracking besides the effect of key factors.

Various multiobjective optimizations have been also carried out. The other authors [8-10] have also studied the thermal cracking and mathematical modeling of different feedstock.

In this paper, thermal cracking of a heavy liquid hydrocarbon was experimentally investigated and products yield distribution was studied. Several experiments were conducted to study the effects of operating parameters on product distribution. In order to generate systematic experimental data, response surface methodology was used. Then a mechanistic model based on free radical chain reactions was developed to predict product distribution.

EXPERIMENTAL SECTION

Feed Characteristics

The selected feed was a heavy liquid hydrocarbon. This feed is the mixture of three industrial residue which wants to be used as a new feedstock in Olefin 12 unit. It was a distilled fraction, 32 °C < bp < 324 °C, with a specific gravity of 0.77. Physicochemical characteristics, composition and mean molecular weight are presented in Table 1.

Table 1: Chemical composition and physicochemical characteristics of heavy liquid hydrocarbon feed.

| Chemical composition (wt%) | |
|------------------------------|--------------|
| n - Paraffin | 26.65 |
| I - paraffin | 28.29 |
| Naphthene | 17.84 |
| Aromatics | 19.3 |
| Olefins | 0.17 |
| Physicochemical properties | |
| Hydrocarbon C ₁₅₊ | 7.75 wt% |
| Specific Gravity | 0.769 g/g |
| Average Molecular Weight | g 148.35 |
| Sulfur | wt ppm 2137 |
| Mercury | 1.13 wt ppb< |
| Lead | ppb wt 3.9< |
| Arsenic | 6.5 wt ppb < |

Thermal Cracking Set-up

A schematic diagram of the experimental set-up is shown in Fig. 1. The hydrocarbon and dilution water are fed into the preheaters by two dosing pumps and then mixture was injected into the reactor at the required flow rate. The setup is controlled by computer [1]. The reactor is a tube that is 1.2 m long and has an internal diameter of 10 mm and outer diameter of 12.7 mm. The temperature of each zone was controlled by separate proportional controllers. The axial temperature profile was measured using a type K thermocouple. Double-pipe heat exchanger was used to cool reactor effluents to the appropriate temperature. A fraction of the product gas is then withdrawn for the analysis via Varian Chrompack CP3800 gas chromatograph, whereas the remainder is sent directly to the flare.

Experimental Design and Collection of Data

CCD method was applied with three design factors, namely the hydrocarbon feed flow rate, the steam ratio and coil outlet temperature. The coded levels and the natural values of the factors are shown in Table 2. The experiments covered the following range of variables: temperature; 750- 900°C, and feed flow rate; 3 - 7 g/min and steam ratio; 0.5-1.4 g/g.

Table 2: Coded and natural levels of the design factors.

| Design factor | -1.68 | -1 | 0 | +1 | 1.68 |
|-------------------------|-------|------|------|------|------|
| Coil outlet temperature | 750 | 780 | 825 | 869 | 900 |
| Feed flow rate (g/min) | 3.0 | 3.8 | 5.0 | 6.2 | 7.0 |
| Steam ratio (g/g) | 0.5 | 0.68 | 0.95 | 1.22 | 1.4 |

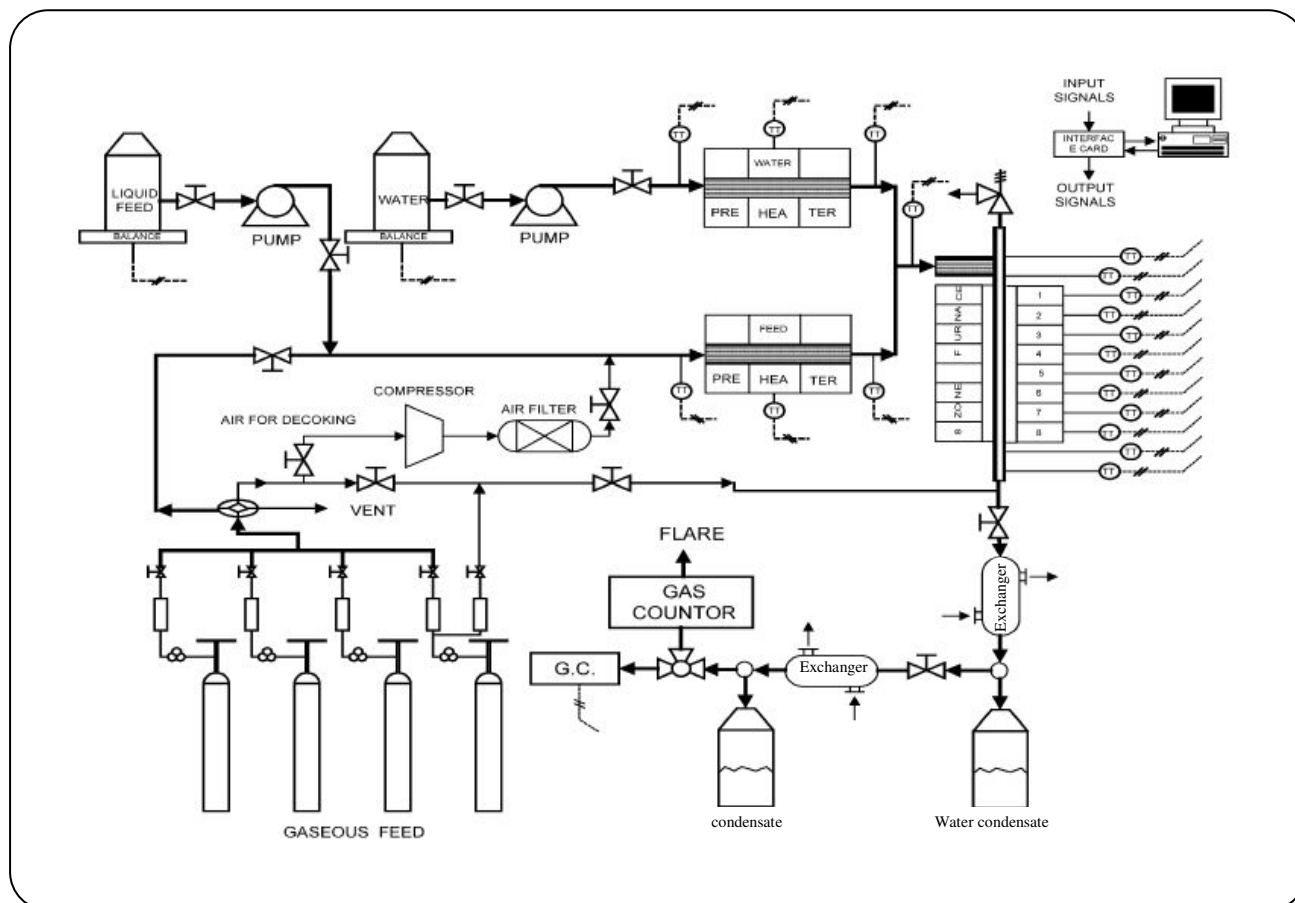


Fig. 1: Schematic diagram of the thermal cracking setup.

Eight response variables concerned including product yield of the main primary products (wt %). Results of the experiments and the design matrix are shown in Table 3.

The Relative Absolute Error (RAE), between predicted and experimental data for every output data of models was defined as an objective function (Eq. (1)).

$$RAE = \frac{|Y_{\text{experimental}} - Y_{\text{predicted}}|}{Y_{\text{experimental}}} \quad (1)$$

MATHEMATICAL MODEL

Reactor model

A one-dimensional plug flow model is used to simulate the reactor of thermal cracking setup. The set of continuity equations for the process gas species is solved simultaneously with the energy, momentum equations [11, 12]. These equations are as follows:

Mass balance:

$$\frac{dF_j}{dz} - \left(\sum_i S_{ij} r_i \right) \frac{\pi d_t^2}{4} = 0 \quad (2)$$

Table 3: Design matrix and results of the central composite design.

| Run | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| COT(°C) | 750 | 900 | 869 | 780 | 825 | 869 | 869 | 780 | 825 |
| Feed flow rate (g/min) | 5 | 5 | 6.2 | 6.2 | 5 | 3.8 | 6.2 | 3.8 | 5 |
| Steam ratio (g/g) | 0.95 | 0.95 | 1.22 | 0.68 | 0.95 | 0.68 | 0.68 | 0.68 | 0.95 |
| Experimental Data | | | | | | | | | |
| CH ₄ | 8.72 | 16.3 | 15.00 | 8.34 | 13.25 | 15.77 | 14.93 | 9.35 | 13.27 |
| C ₂ H ₆ | 3.72 | 1.82 | 1.93 | 2.5 | 2.27 | 2.2 | 2.00 | 3.41 | 2.23 |
| C ₂ H ₄ | 19.75 | 29.9 | 28.34 | 18.53 | 25.8 | 30.09 | 27.8 | 20.74 | 25.3 |
| C ₃ H ₈ | 1.75 | 0.67 | 0.93 | 1.49 | 1.22 | 0.84 | 0.94 | 1.18 | 1.25 |
| C ₃ H ₆ | 13.21 | 9.45 | 12.05 | 14.03 | 14.31 | 10.4 | 11.85 | 13.31 | 14.41 |
| C ₄ H ₈ | 3.71 | 1.47 | 1.95 | 3.51 | 2.26 | 1.74 | 2.07 | 3.44 | 2.26 |
| H ₂ | 0.9 | 1.43 | 1.31 | 0.89 | 1.18 | 1.4 | 1.33 | 0.95 | 1.2 |
| C ₅₊ | 40.18 | 29.72 | 29.23 | 43.09 | 31.06 | 27.9 | 28.73 | 41.1 | 31.26 |
| Experimental Data132.8 | | | | | | | | | |
| Run | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | |
| COT(°C) | 780 | 869 | 825 | 825 | 825 | 825 | 780 | 825 | |
| Feed flow rate (g/min) | 3.8 | 3.8 | 5 | 7 | 3 | 5 | 6.2 | 5 | |
| Steam ratio (g/g) | 1.22 | 1.22 | 0.5 | 0.95 | 0.95 | 0.95 | 1.22 | 1.4 | |
| Experimental Data132.8 | | | | | | | | | |
| CH ₄ | 9.67 | 15.94 | 12.76 | 10.7 | 15.32 | 13.28 | 8.6 | 14.8 | |
| C ₂ H ₆ | 3.45 | 2.06 | 2.61 | 1.97 | 2.69 | 2.19 | 2.51 | 2.17 | |
| C ₂ H ₄ | 21.73 | 30.37 | 24.74 | 23.45 | 28.4 | 25.07 | 191 | 26.12 | |
| C ₃ H ₈ | 1.14 | 0.83 | 1.42 | 1.63 | 0.84 | 1.28 | 1.4 | 1.2 | |
| C ₃ H ₆ | 13.38 | 10.62 | 13.71 | 15.37 | 13.49 | 14.55 | 14.17 | 15.12 | |
| C ₄ H ₈ | 3.4 | 0.9 | 2.49 | 2.93 | 2.15 | 2.24 | 3.52 | 2.1 | |
| H ₂ | 0.92 | 1.37 | 1.26 | 1.15 | 1.37 | 1.21 | 0.87 | 0.99 | |
| C ₅₊ | 39.52 | 28.12 | 31.9 | 33.87 | 28.15 | 31.87 | 42.19 | 30.61 | |

Energy balance:

$$\sum_j F_j C_{pj} \frac{dT}{dz} = Q(z) \pi d_t + \frac{\pi d_t^2}{4} \sum_i r_{ri} (-\Delta H)_i \quad (3)$$

Momentum balance:

$$\left(\frac{1}{M_m P_t} - \frac{P_t}{\eta G^2 RT} \right) \frac{dP_t}{dz} = \frac{d}{dz} \left(\frac{1}{M_m} \right) + \frac{1}{M_m} \left(\frac{1}{T} \frac{dT}{dz} + F_r \right) \quad (4)$$

Which F_r is the friction factor and is calculated as follow:

$$F_r = 0.092 \frac{Re^{-0.2}}{d_t} + \frac{\zeta}{\pi R_b} \quad (5)$$

and for the tube bends as

$$\zeta = \left(0.7 + 0.35 \frac{\Lambda}{90^\circ} \right) \left(0.051 + 0.19 \frac{d_t}{R_b} \right) \quad (6)$$

Where R_b and Λ represents the radius of the tube bend and angle of bend, respectively. *Towfighi et al.* [12] have shown the detail description of the applied mathematical model.

Kinetic model

There are three kinds of model to state kinetic model which are empirical, molecular, and mechanistic models. Due to the flexibility and accuracy, mechanistic radical kinetic models were widely accepted for thermal cracking reaction [13,14]. As shown in Table 1, the feed analysis contains n-paraffins, iso-paraffins, naphthenes and aromatics.



The proposed kinetic model is semi-mechanistic model of radical decomposition based on the simplified theory of radical and pure molecular reactions. The radical reactions contain chain-initiation reactions, chain-propagation reactions, chain-termination reactions, secondary reaction, and isomerization reaction [15-16]. Molecular reactions contain dehydrogenation, Diels-Alder molecular reaction and isomerization reaction. The developed model delete consists of the following reaction:

• Radical reaction


1- Chain-initiation reaction, for example:





2- Chain-propagation reaction, for example:



3- Chain-termination reaction, for example:




4- Secondary reaction, for example:




• Molecular reaction


1- Olefin isomerization, for example:



2- Dehydrogenation reaction, for example:



3- Diels – Alder Molecular reaction, for example:



4- Other molecular reaction, for example:

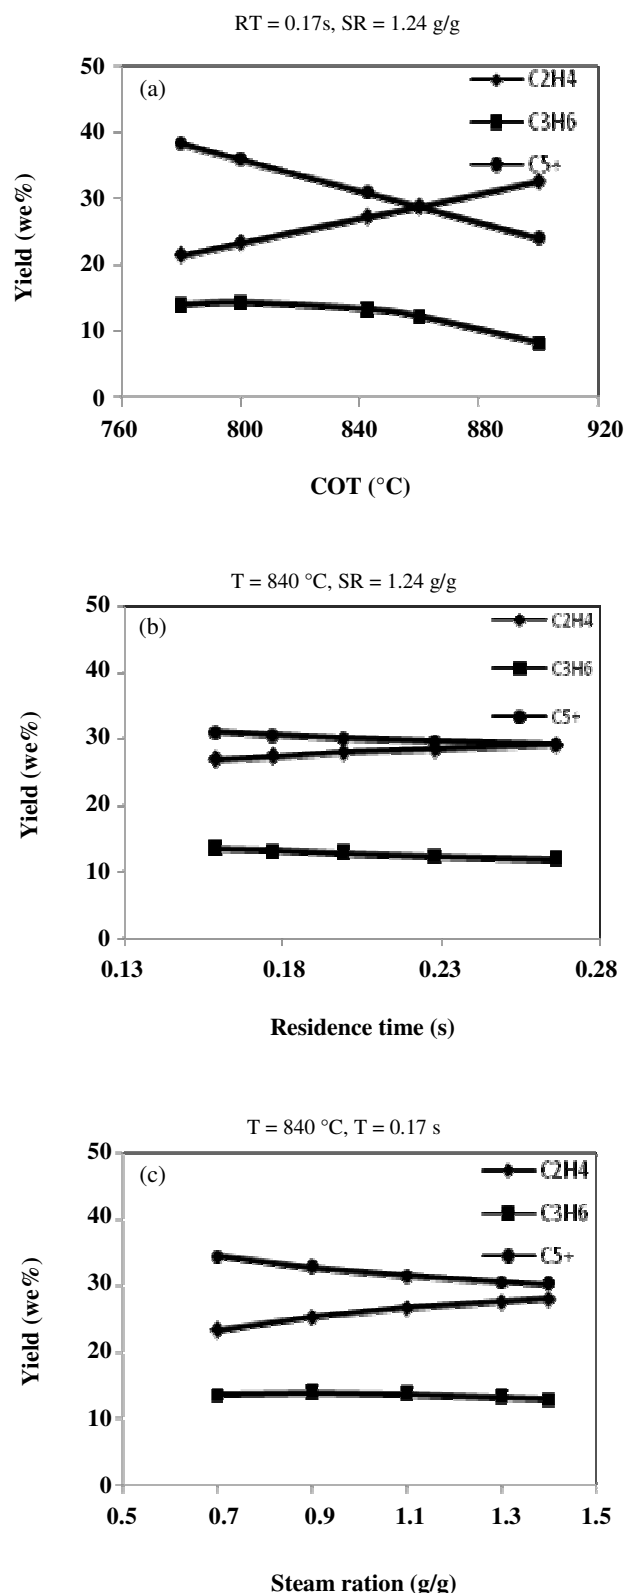
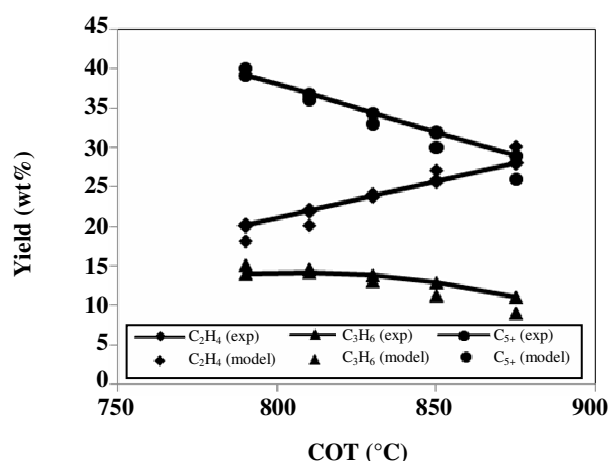
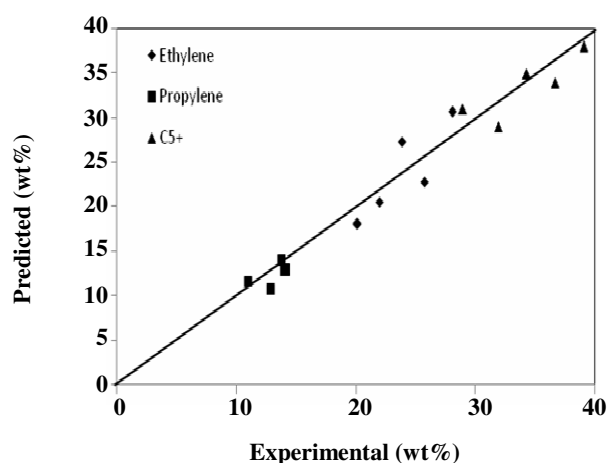


Fig. 2: Effect of (a) COT(°C), (b) residence time(s) and (c) steam ratio (g/g) on the yield of C₂H₄, C₃H₆, C₅⁺.

Table 4: Comparison of simulated and experimental product distributions.

| Parameter | Test 1 | | Test 2 | | Test 3 | |
|-------------------------------|------------|-------|------------|-------|------------|-------|
| | Experiment | model | Experiment | model | Experiment | model |
| COT(°C) | 830 | 830 | 885 | 885 | 765 | 765 |
| Feed flow rate(g/min) | 5.1 | 5.1 | 6.5 | 6.5 | 4.1 | 4.1 |
| Steam ratio (g/g) | 0.7 | 0.7 | 1.15 | 1.15 | 0.9 | 0.9 |
| Yield (wt %) | | | | | | |
| CH ₄ | 14 | 12.57 | 15.4 | 14.6 | 9.22 | 8.53 |
| C ₂ H ₆ | 2.14 | 2.1 | 1.8 | 1.91 | 3.00 | 2.87 |
| C ₂ H ₄ | 26.9 | 24.8 | 28.2 | 30.2 | 19.7 | 20.34 |
| C ₃ H ₆ | 14 | 14.54 | 9.65 | 9.35 | 13.41 | 14.06 |
| C ₅ ⁺ | 32.7 | 34.6 | 31.9 | 33.6 | 41.3 | 43.7 |

Fig. 3: Effect of COT (°C) on C₂H₄, C₃H₆ and C₅⁺ yields predicted by developed model.Fig. 4: Scatter diagram of C₂H₄, C₃H₆ and C₅⁺ yield.

To avoid complexity in reaction network, the detected species of heavy liquid hydrocarbon were lumped to four pseudo components as n-C₉H₂₀ and i-C₉H₂₀ for normal paraffins and iso paraffins, C₉H₁₈ for naphthenes, and C₁₀H₁₄ for aromatics. Based on pseudo components, reaction network includes 148 reactions for 43 species. The developed reaction network is presented in Table 5. Due to differences between radicals and molecules concentrations, the governing mass, energy and momentum balance equations can be solved with Gear method.

RESULTS AND DISCUSSION

The effect of temperature, Residence Time (RT) and Steam Ratio (SR) on product distribution of ethylene, propylene and C₅⁺ is shown in Fig. 2. As shown in Fig. 2(a), increasing the temperature improves the ethylene yield. The main part of C₅⁺ is untreated feed. By increasing the temperature, the conversion increases which leads to the sharp decline in the yield of C₅⁺ and increase in the yield of ethylene as shown in Fig. 2(a). The yield of propylene increases slightly and reaches a maximum and then

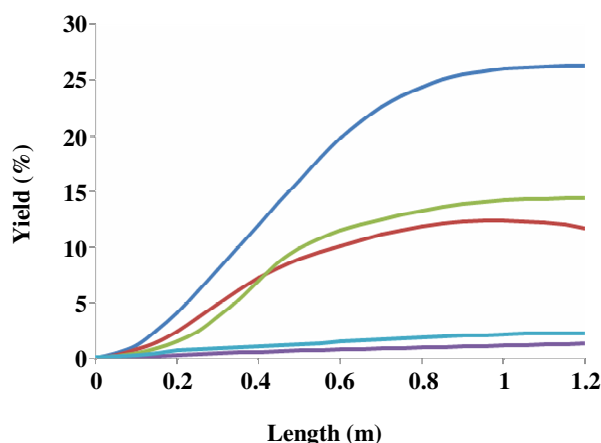


Fig. 5: Profile of yields of main products along the reactor at residence time=0.3 sec, COT=850 °C, steam ratio=0.6.

it decreases. This is due to the fact that propylene was produced at primary reaction and after duration of time, it was consumed in secondary reactions [7]. Fig. 2(b) shows that with the increase of residence time, the ethylene yield increases, whereas both propylene yield and C_5^+ yield decreases. In order to achieve high ethylene yield, the residence time should be increased. However, the yield of propylene should be considered.

Fig. 2(c) shows the effect of steam ratio on the yields of ethylene, propylene and heavy compound. It is shown that yield of ethylene increases with increasing the steam ratio, while C_5^+ and propylene decrease. In Table 3, the maximum yield of ethylene is 30.37 wt% at COT, residence time and steam ratio of 869 °C, 0.208 sec and 1.22 (g/g), respectively. The maximum yield of propylene is 15.37 wt% at COT, residence time and steam ratio of 825 °C, 0.147 sec and 0.95 (g/g), respectively.

The model was developed to determine the product yields in the total mentioned ranges. Fig. 3 shows the effect of temperature on ethylene, propylene and C_5^+ yields in both experiment and model results. Results of the experiment and model for different conditions are shown in Table 4. As it was shown, there is a good consistency between experimental and model data.

Fig. 4 shows a typical scatter diagram for products distribution of heavy liquid hydrocarbon. It indicates a good agreement between the predicted and experimental data.

The main product yields vs. the length of the reactor are shown in Fig. 5. In general, the yields of ethylene, methane, ethane and hydrogen products increase continuously along the reactor. Due to the secondary reactions the yield of propylene increases and reaches a maximum value and then decreases.

CONCLUSIONS

The goal of this study was to obtain experimental data on thermal cracking of a heavy liquid hydrocarbon and to develop a kinetic model in order to predict product distribution of olefins. Central composite design was used to carry out the experiments. Regarding the results, the maximum yield of ethylene and propylene was obtained 30.37 wt% and 15.37 wt%, respectively. Increasing temperature, residence time and steam ratio increases the ethylene yield. But there is a limitation for propylene by increasing the operating parameters and its optimum amount was found at 825°C.

Finally, the developed kinetic model was compared with experimental data. There was a good agreement between model results, which is based on free radical chain reactions, and experimental data. Furthermore, the trends of main products were studied along the reactor.

Acknowledgements

Financial support from Chemical Engineering Center of Excellence at Tarbiat Modares University is highly appreciated.

Notation

| | |
|-----------|--|
| COT | Coil outlet temperature, °C |
| C_{p_j} | Specific heat capacity of jth component, J/mol K |
| d_t | Diameter of reactor tube, m |
| F_j | Molar flow rate of jth component, mol/s |
| M_m | Molecular weight of mixture, g/mol |
| Q | Heat flux, kW/m ³ |
| r_{ri} | Rate of reactions, mol/m ³ ·s |
| Re | Reynolds number |

Received : Dec. 30, 2009 ; Accepted : Apr. 30, 2010

Table 5: The developed reaction network.

| No. | Reaction | Parameters Adopted | |
|---------------------------------|--|----------------------|----------------|
| | | LOG (A) ¹ | E ² |
| 1. Paraffin → Radical + Radical | | | |
| 1 | $C_9H_{20} \rightarrow C_5H_{11}^\bullet + 1-C_4H_9^\bullet$ | 14.5 | 80.0 |
| 2 | $C_9H_{20} \rightarrow C_6H_{13}^\bullet + 1-C_3H_7^\bullet$ | 14.5 | 80.0 |
| 3 | $C_9H_{20} \rightarrow C_7H_{15}^\bullet + C_2H_5^\bullet$ | 14.5 | 80.0 |
| 4 | $C_9H_{20} \rightarrow C_8H_{17}^\bullet + CH_3^\bullet$ | 14.5 | 80.0 |
| 5 | $C_9H_{20} \rightarrow C_9H_{19}^\bullet + H^\bullet$ | 14.5 | 85.0 |
| 6 | $i-C_9H_{20} \rightarrow CH_3^\bullet + i-C_8H_{17}^\bullet$ | 14.5 | 80.0 |
| 7 | $i-C_9H_{20} \rightarrow C_2H_5^\bullet + i-C_7H_{15}^\bullet$ | 14.5 | 80.0 |
| 8 | $i-C_9H_{20} \rightarrow 1-C_3H_7^\bullet + i-C_6H_{13}^\bullet$ | 14.5 | 80.0 |
| 9 | $i-C_9H_{20} \rightarrow 1-C_4H_9^\bullet + i-C_5H_{11}^\bullet$ | 14.5 | 80.0 |
| 10 | $i-C_9H_{20} \rightarrow i-C_4H_9^\bullet + C_5H_{11}^\bullet$ | 14.5 | 80.0 |
| 11 | $i-C_9H_{20} \rightarrow 2-C_3H_7^\bullet + C_6H_{13}^\bullet$ | 14.5 | 80.0 |
| 12 | $i-C_9H_{20} \rightarrow H^\bullet + i-C_9H_{19}^\bullet$ | 14.5 | 83.0 |
| 13 | $C_9H_{18} \rightarrow 1-C_4H_7^\bullet + C_5H_{11}^\bullet$ | 14.0 | 75.0 |
| 2. Radical → Radical + Radical | | | |
| 14 | $C_9H_{19}^\bullet \rightarrow C_2H_4 + C_7H_{15}^\bullet$ | 13.2 | 30.0 |
| 15 | $C_9H_{19}^\bullet \rightarrow C_3H_6 + C_6H_{13}^\bullet$ | 13.0 | 30.0 |
| 16 | $C_9H_{19}^\bullet \rightarrow 1-C_4H_8 + C_5H_{11}^\bullet$ | 12.6 | 29.0 |
| 17 | $C_9H_{19}^\bullet \rightarrow C_5H_{10} + 1-C_4H_9^\bullet$ | 13.0 | 35.0 |
| 18 | $C_8H_{17}^\bullet \rightarrow C_2H_4 + C_6H_{13}^\bullet$ | 13.4 | 31.0 |
| 19 | $C_8H_{17}^\bullet \rightarrow C_3H_6 + C_5H_{11}^\bullet$ | 13.3 | 30.0 |
| 20 | $C_8H_{17}^\bullet \rightarrow 1-C_4H_8 + 1-C_4H_9^\bullet$ | 12.6 | 29.0 |
| 21 | $C_8H_{17}^\bullet \rightarrow C_5H_{10} + 1-C_3H_7^\bullet$ | 14.0 | 32.5 |
| 22 | $C_7H_{15}^\bullet \rightarrow C_2H_4 + C_5H_{11}^\bullet$ | 13.6 | 45.0 |
| 23 | $C_7H_{15}^\bullet \rightarrow C_3H_6 + C_4H_9^\bullet$ | 13.3 | 31.0 |
| 24 | $C_7H_{15}^\bullet \rightarrow 1-C_4H_8 + 1-C_3H_7^\bullet$ | 13.0 | 29.0 |
| 25 | $C_7H_{15}^\bullet \rightarrow C_5H_{10} + C_2H_5^\bullet$ | 14.1 | 32.5 |
| 26 | $C_6H_{13}^\bullet \rightarrow C_2H_4 + 1-C_4H_9^\bullet$ | 13.4 | 30.0 |
| 27 | $C_6H_{13}^\bullet \rightarrow C_3H_6 + 1-C_3H_7^\bullet$ | 13.2 | 29.0 |
| 28 | $C_6H_{13}^\bullet \rightarrow 1-C_4H_8 + C_2H_5^\bullet$ | 12.6 | 31.0 |

1. Unit of A is: s^{-1} or $L mol^{-1} s^{-1}$ 2. Unit of E is: $kCal / mol$

Table 5 (Continued)

| No. | Reaction | Parameters Adopted | |
|-----|--|----------------------|----------------|
| | | LOG (A) ¹ | E ² |
| 29 | $C_6H_{13}^\bullet \rightarrow C_5H_{10} + CH_3^\bullet$ | 14.0 | 32.5 |
| 30 | $1-C_4H_7^\bullet \rightarrow C_4H_6 + H^\bullet$ | 11.0 | 49.3 |
| 31 | $1-C_4H_7^\bullet \rightarrow C_2H_4 + C_2H_5^\bullet$ | 14.1 | 39.0 |
| 32 | $C_5H_{11}^\bullet \rightarrow C_2H_4 + 1-C_3H_7^\bullet$ | 13.5 | 28.4 |
| 33 | $C_5H_{11}^\bullet \rightarrow C_3H_6 + C_2H_5^\bullet$ | 13.7 | 38.0 |
| 34 | $C_5H_{11}^\bullet \rightarrow C_4H_8 + CH_3^\bullet$ | 13.5 | 31.5 |
| 35 | $C_5H_{11}^\bullet \rightarrow C_5H_{10} + H^\bullet$ | 13.7 | 38.6 |
| 36 | $1-C_4H_9^\bullet \rightarrow C_2H_4 + C_2H_5^\bullet$ | 12.2 | 29.0 |
| 37 | $1-C_4H_9^\bullet \rightarrow C_3H_6 + CH_3^\bullet$ | 13.3 | 34.0 |
| 38 | $1-C_4H_9^\bullet \rightarrow 1-C_4H_8 + H^\bullet$ | 13.0 | 36.6 |
| 39 | $2-C_3H_7^\bullet \rightarrow C_3H_6 + H^\bullet$ | 13.3 | 38.7 |
| 40 | $1-C_3H_7^\bullet \rightarrow C_2H_4 + CH_3^\bullet$ | 13.6 | 32.6 |
| 41 | $1-C_3H_7^0 \rightarrow C_3H_6 + H^0$ | 13.3 | 38.4 |
| 42 | $C_2H_3^\bullet \rightarrow C_2H_2 + H^\bullet$ | 9.3 | 31.5 |
| 43 | $i-C_9H_{19}^\bullet \rightarrow C_2H_4 + i-C_7H_{15}^\bullet$ | 13.1 | 32.5 |
| 44 | $i-C_9H_{19}^\bullet \rightarrow C_3H_6 + i-C_6H_{13}^\bullet$ | 12.5 | 30.0 |
| 45 | $i-C_9H_{19}^\bullet \rightarrow C_3H_6 + C_6H_{13}^\bullet$ | 13.1 | 32.0 |
| 46 | $i-C_9H_{19}^\bullet \rightarrow 1-C_4H_8 + i-C_5H_{11}^\bullet$ | 12.8 | 30.0 |
| 47 | $i-C_9H_{19}^\bullet \rightarrow i-C_4H_8 + C_5H_{11}^\bullet$ | 13.0 | 29.0 |
| 48 | $i-C_9H_{19}^\bullet \rightarrow C_5H_{10} + i-C_4H_9^\bullet$ | 13.5 | 31.0 |
| 49 | $i-C_8H_{17}^\bullet \rightarrow C_2H_4 + i-C_6H_{13}^\bullet$ | 13.2 | 32.0 |
| 50 | $i-C_8H_{17}^\bullet \rightarrow C_3H_6 + i-C_5H_{11}^\bullet$ | 13.3 | 31.0 |
| 51 | $i-C_8H_{17}^\bullet \rightarrow C_3H_6 + C_5H_{11}^\bullet$ | 13.3 | 30.0 |
| 52 | $i-C_8H_{17}^\bullet \rightarrow 1-C_4H_8 + i-C_4H_9^\bullet$ | 12.5 | 30.0 |
| 53 | $i-C_8H_{17}^\bullet \rightarrow i-C_4H_8 + 1-C_4H_9^\bullet$ | 12.5 | 31.0 |
| 54 | $i-C_8H_{17}^\bullet \rightarrow C_5H_{10} + 2-C_3H_7^\bullet$ | 13.5 | 30.1 |
| 55 | $i-C_7H_{15}^\bullet \rightarrow C_2H_4 + i-C_5H_{11}^\bullet$ | 13.5 | 43.0 |
| 56 | $i-C_7H_{15}^\bullet \rightarrow C_3H_6 + i-C_4H_9^\bullet$ | 13.1 | 30.0 |
| 57 | $i-C_7H_{15}^\bullet \rightarrow C_3H_6 + 1-C_4H_9^\bullet$ | 13.0 | 32.5 |
| 58 | $i-C_7H_{15}^\bullet \rightarrow 1-C_4H_8 + 2-C_3H_7^\bullet$ | 13.0 | 29.5 |

Table 5 (Continued)

| No. | Reaction | Parameters Adopted | |
|--|---|----------------------|----------------|
| | | LOG (A) ¹ | E ² |
| 59 | $i\text{-C}_7\text{H}_{15}^\bullet \rightarrow i\text{-C}_4\text{H}_8 + 1\text{-C}_3\text{H}_7^\bullet$ | 12.5 | 31.0 |
| 60 | $i\text{-C}_6\text{H}_{13}^\bullet \rightarrow \text{C}_2\text{H}_4 + i\text{-C}_4\text{H}_9^\bullet$ | 13.2 | 31.0 |
| 61 | $i\text{-C}_6\text{H}_{13}^\bullet \rightarrow \text{C}_3\text{H}_6 + 2\text{-C}_3\text{H}_7^\bullet$ | 13.4 | 31.0 |
| 62 | $i\text{-C}_6\text{H}_{13}^\bullet \rightarrow \text{C}_3\text{H}_6 + 1\text{-C}_3\text{H}_7^\bullet$ | 13.1 | 29.0 |
| 63 | $i\text{-C}_6\text{H}_{13}^\bullet \rightarrow i\text{-C}_4\text{H}_8 + \text{C}_2\text{H}_5^\bullet$ | 13.4 | 32.5 |
| 64 | $i\text{-C}_5\text{H}_{11}^\bullet \rightarrow \text{C}_2\text{H}_4 + 2\text{-C}_3\text{H}_7^\bullet$ | 13.0 | 29.0 |
| 65 | $i\text{-C}_5\text{H}_{11}^\bullet \rightarrow \text{C}_3\text{H}_6 + \text{C}_2\text{H}_5^\bullet$ | 13.1 | 31.0 |
| 66 | $i\text{-C}_5\text{H}_{11}^\bullet \rightarrow 1\text{-C}_4\text{H}_8 + \text{CH}_3^\bullet$ | 13.7 | 32.8 |
| 67 | $i\text{-C}_5\text{H}_{11}^\bullet \rightarrow i\text{-C}_4\text{H}_8 + \text{CH}_3^\bullet$ | 13.0 | 30.0 |
| 68 | $i\text{-C}_4\text{H}_9^\bullet \rightarrow \text{C}_3\text{H}_6 + \text{CH}_3^\bullet$ | 14.0 | 32.8 |
| 69 | $i\text{-C}_4\text{H}_9^\bullet \rightarrow i\text{-C}_4\text{H}_8 + \text{H}^\bullet$ | 13.5 | 30.0 |
| 70 | $i\text{-C}_4\text{H}_9^\bullet \rightarrow 2\text{-C}_4\text{H}_8 + \text{H}^\bullet$ | 13.0 | 30.2 |
| 3. Paraffin + Radical \rightarrow Paraffin + Radical | | | |
| 71 | $\text{C}_9\text{H}_{20} + \text{H}^\bullet \rightarrow \text{C}_9\text{H}_{19}^\bullet + \text{H}_2$ | 12.0 | 15.0 |
| 72 | $\text{C}_9\text{H}_{20} + \text{CH}_3^\bullet \rightarrow \text{C}_9\text{H}_{19}^\bullet + \text{CH}_4$ | 11.5 | 9.5 |
| 73 | $\text{C}_9\text{H}_{20} + \text{C}_2\text{H}_5^\bullet \rightarrow \text{C}_9\text{H}_{19}^\bullet + \text{C}_2\text{H}_6$ | 11.6 | 10.0 |
| 74 | $\text{C}_9\text{H}_{20} + 1\text{-C}_3\text{H}_7^\bullet \rightarrow \text{C}_9\text{H}_{19}^\bullet + \text{C}_3\text{H}_8$ | 11.1 | 11.0 |
| 75 | $\text{C}_9\text{H}_{20} + \text{C}_2\text{H}_3^\bullet \rightarrow \text{C}_9\text{H}_{19}^\bullet + \text{C}_2\text{H}_4$ | 11.5 | 9.0 |
| 76 | $i\text{-C}_9\text{H}_{20} + \text{H}^\bullet \rightarrow \text{H}_2 + i\text{-C}_9\text{H}_{19}^\bullet$ | 11.0 | 12.5 |
| 77 | $i\text{-C}_9\text{H}_{20} + \text{CH}_3^\bullet \rightarrow \text{CH}_4 + i\text{-C}_9\text{H}_{19}^\bullet$ | 11.5 | 9.0 |
| 78 | $i\text{-C}_9\text{H}_{20} + \text{C}_2\text{H}_3^\bullet \rightarrow \text{C}_2\text{H}_4 + i\text{-C}_9\text{H}_{19}^\bullet$ | 12.0 | 9.5 |
| 79 | $i\text{-C}_9\text{H}_{20} + \text{C}_2\text{H}_5^\bullet \rightarrow \text{C}_2\text{H}_6 + i\text{-C}_9\text{H}_{19}^\bullet$ | 11.1 | 10.0 |
| 80 | $i\text{-C}_9\text{H}_{20} + 1\text{-C}_3\text{H}_7^\bullet \rightarrow \text{C}_3\text{H}_8 + i\text{-C}_9\text{H}_{19}^\bullet$ | 10.1 | 9.0 |
| 81 | $i\text{-C}_9\text{H}_{20} + 2\text{-C}_3\text{H}_7^\bullet \rightarrow \text{C}_3\text{H}_8 + i\text{-C}_9\text{H}_{19}^\bullet$ | 10.5 | 8.0 |
| 82 | $\text{C}_3\text{H}_8 + \text{H}^\bullet \rightarrow 1\text{-C}_3\text{H}_7^\bullet + \text{H}_2$ | 10.5 | 9.7 |
| 83 | $\text{C}_3\text{H}_8 + \text{CH}_3^\bullet \rightarrow 1\text{-C}_3\text{H}_7^\bullet + \text{CH}_4$ | 9.0 | 12.5 |
| 84 | $\text{C}_3\text{H}_8 + \text{C}_2\text{H}_5^\bullet \rightarrow 1\text{-C}_3\text{H}_7^\bullet + \text{C}_2\text{H}_6$ | 8.5 | 12.3 |
| 85 | $\text{C}_2\text{H}_6 + \text{H}^\bullet \rightarrow \text{C}_2\text{H}_5^\bullet + \text{H}_2$ | 11.1 | 10.5 |
| 86 | $\text{C}_2\text{H}_6 + \text{CH}_3^\bullet \rightarrow \text{C}_2\text{H}_5^\bullet + \text{CH}_4$ | 11.6 | 16.5 |
| 87 | $\text{C}_2\text{H}_6 + 1\text{-C}_3\text{H}_7^\bullet \rightarrow \text{C}_2\text{H}_5^\bullet + \text{C}_3\text{H}_8$ | 8.0 | 10.0 |
| 88 | $\text{CH}_4 + \text{H}^\bullet \rightarrow \text{CH}_3^\bullet + \text{H}_2$ | 11.5 | 12.5 |

Table 5 (Continued)

| No. | Reaction | Parameters Adopted | |
|---|--|----------------------|----------------|
| | | LOG (A) ¹ | E ² |
| 89 | $\text{CH}_4 + \text{C}_2\text{H}_5^\bullet \rightarrow \text{CH}_3^\bullet + \text{C}_2\text{H}_6$ | 7.0 | 11.0 |
| 90 | $\text{CH}_4 + 1\text{-C}_3\text{H}_7^\bullet \rightarrow \text{CH}_3^\bullet + \text{C}_3\text{H}_8$ | 8.3 | 18.0 |
| 91 | $\text{H}_2 + \text{CH}_3^\bullet \rightarrow \text{H}^\bullet + \text{CH}_4$ | 8.9 | 10.9 |
| 92 | $\text{H}_2 + \text{C}_2\text{H}_5^\bullet \rightarrow \text{H}^\bullet + \text{C}_2\text{H}_6$ | 9.5 | 13.0 |
| 93 | $\text{H}_2 + 1\text{-C}_3\text{H}_7^\bullet \rightarrow \text{H}^\bullet + \text{C}_3\text{H}_8$ | 9.0 | 15.6 |
| 94 | $\text{H}_2 + 2\text{-C}_3\text{H}_7^\bullet \rightarrow \text{H}^\bullet + \text{C}_3\text{H}_8$ | 9.5 | 15.0 |
| 95 | $\text{H}_2 + \text{C}_3\text{H}_5^\bullet \rightarrow \text{H}^{\bullet 0} + \text{C}_3\text{H}_6$ | 10.5 | 20.0 |
| 96 | $\text{H}_2 + 1\text{-C}_4\text{H}_9^\bullet \rightarrow \text{H}^\bullet + \text{C}_4\text{H}_{10}$ | 9.5 | 16.5 |
| 97 | $\text{H}_2 + 2\text{-C}_4\text{H}_9^\bullet \rightarrow \text{H}^\bullet + \text{C}_4\text{H}_{10}$ | 9.7 | 17.5 |
| 98 | $\text{H}_2 + i\text{-C}_4\text{H}_9^\bullet \rightarrow \text{H}^\bullet + \text{C}_4\text{H}_{10}$ | 9.5 | 16.5 |
| 99 | $\text{C}_2\text{H}_6 + 1\text{-C}_4\text{H}_9^\bullet \rightarrow \text{C}_2\text{H}_5 + \text{C}_4\text{H}_{10}$ | 8.5 | 12.5 |
| 100 | $\text{C}_2\text{H}_6 + 2\text{-C}_4\text{H}_9^\bullet \rightarrow \text{C}_2\text{H}_5 + \text{C}_4\text{H}_{10}$ | 8.0 | 12.9 |
| 101 | $\text{C}_2\text{H}_6 + i\text{-C}_4\text{H}_9^{\bullet 0} \rightarrow \text{C}_2\text{H}_5 + i\text{-C}_4\text{H}_{10}$ | 8.5 | 12.5 |
| 4. Radical + Radical \rightarrow Paraffin | | | |
| 102 | $1\text{-C}_3\text{H}_7^\bullet + \text{H}^\bullet \rightarrow \text{C}_3\text{H}_8$ | 11.0 | 0 |
| 103 | $\text{C}_2\text{H}_5^\bullet + \text{H}^\bullet \rightarrow \text{C}_2\text{H}_6$ | 11.5 | 0 |
| 104 | $2\text{-C}_3\text{H}_7^\bullet + \text{H}^\bullet \rightarrow \text{C}_3\text{H}_8$ | 11.0 | 0 |
| 105 | $1\text{-C}_4\text{H}_9^\bullet + \text{H}^\bullet \rightarrow \text{C}_4\text{H}_{10}$ | 11.0 | 0 |
| 106 | $i\text{-C}_4\text{H}_9^\bullet + \text{H}^\bullet \rightarrow i\text{-C}_4\text{H}_{10}$ | 11.0 | 0 |
| 107 | $\text{C}_5\text{H}_{11}^\bullet + \text{H}^\bullet \rightarrow \text{C}_5\text{H}_{12}$ | 11.0 | 0 |
| 108 | $2\text{-C}_3\text{H}_7^\bullet + \text{CH}_3^\bullet \rightarrow i\text{-C}_4\text{H}_{10}$ | 10.3 | 0 |
| 109 | $\text{C}_6\text{H}_{13}^\bullet + \text{H}^\bullet \rightarrow \text{C}_6\text{H}_{14}$ | 11.0 | 0 |
| 110 | $\text{CH}_3^\bullet + \text{CH}_3^\bullet \rightarrow \text{C}_2\text{H}_6$ | 11.3 | 0 |
| 5. Secondary Reaction I; Olefin + Radical \rightarrow Paraffin + Olefinic Radical | | | |
| 111 | $\text{C}_3\text{H}_6 + \text{H}^\bullet \rightarrow \text{C}_3\text{H}_5^\bullet + \text{H}_2$ | 10.7 | 5.0 |
| 112 | $\text{C}_3\text{H}_6 + \text{CH}_3^\bullet \rightarrow \text{C}_3\text{H}_5^\bullet + \text{CH}_4$ | 7.5 | 8.0 |
| 113 | $\text{C}_3\text{H}_6 + \text{C}_2\text{H}_5^\bullet \rightarrow \text{C}_3\text{H}_5^\bullet + \text{C}_2\text{H}_6$ | 8.0 | 10.5 |
| 114 | $\text{C}_3\text{H}_8 + \text{C}_3\text{H}_5^\bullet \rightarrow \text{C}_3\text{H}_6 + 1\text{-C}_3\text{H}_7^\bullet$ | 9.0 | 20.5 |
| 115 | $1\text{-C}_4\text{H}_8 + \text{H}^\bullet \rightarrow \text{C}_4\text{H}_7^\bullet + \text{H}_2$ | 11.0 | 5.0 |
| 116 | $1\text{-C}_4\text{H}_8 + \text{CH}_3^\bullet \rightarrow \text{C}_4\text{H}_7^\bullet + \text{CH}_4$ | 8.0 | 7.3 |
| 117 | $1\text{-C}_4\text{H}_8 + \text{C}_2\text{H}_5^\bullet \rightarrow \text{C}_4\text{H}_7^\bullet + \text{C}_2\text{H}_6$ | 8.0 | 8.3 |
| 118 | $\text{C}_3\text{H}_8 + \text{C}_4\text{H}_7^\bullet \rightarrow \text{C}_4\text{H}_8 + 1\text{-C}_3\text{H}_7^\bullet$ | 9.69 | 6.0 |

Table 5 (Continued)

| No. | Reaction | Parameters Adopted | |
|----------------------------|--|----------------------|----------------|
| | | LOG (A) ¹ | E ² |
| 119 | $C_5H_{10} + H^{\bullet 0} \rightarrow C_5H_9^{\bullet} + H_2$ | 12.0 | 8.0 |
| 120 | $C_5H_{10} + CH_3^{\bullet} \rightarrow C_5H_9^{\bullet} + CH_4$ | 9.7 | 12.5 |
| 121 | $C_5H_{10} + C_2H_5^{\bullet} \rightarrow C_5H_9^{\bullet} + C_2H_6$ | 9.6 | 14.5 |
| 122 | $C_3H_8 + C_5H_9^{\bullet} \rightarrow C_5H_{10} + 1-C_3H_7^{\bullet}$ | 9.69 | 16.0 |
| 6. Secondary Reaction II | | | |
| 123 | $C_2H_4 + H^{\bullet} \rightarrow C_2H_3^{\bullet} + H_2$ | 8.9 | 4.0 |
| 124 | $C_2H_4 + CH_3^{\bullet} \rightarrow C_2H_3^{\bullet} + CH_4$ | 10.0 | 12.0 |
| 125 | $C_2H_4 + C_2H_5^{\bullet} \rightarrow C_2H_3^{\bullet} + C_2H_6$ | 9.4 | 25.0 |
| 126 | $C_2H_4 + H^{\bullet} \rightarrow C_2H_5^{\bullet}$ | 9.9 | 1.5 |
| 127 | $C_2H_4 + CH_3^{\bullet} \rightarrow 1-C_3H_7^{\bullet}$ | 8.6 | 7.9 |
| 128 | $C_2H_4 + C_2H_5^{\bullet} \rightarrow 1-C_4H_9^{\bullet}$ | 7.8 | 7.6 |
| 129 | $C_2H_4 + C_2H_3^{\bullet} \rightarrow C_4H_6 + H^{\bullet}$ | 11.0 | 50.0 |
| 130 | $C_2H_4 + C_2H_3^{\bullet} \rightarrow C_4H_7^{\bullet}$ | 7.7 | 5.5 |
| 131 | $C_3H_6 + H^{\bullet} \rightarrow 1-C_3H_7^{\bullet}$ | 10.1 | 3.0 |
| 132 | $C_3H_6 + CH_3^{\bullet} \rightarrow 1-C_4H_9^{\bullet}$ | 8.5 | 7.4 |
| 133 | $1-C_4H_8 + H^{\bullet 0} \rightarrow 1-C_4H_9^{\bullet}$ | 9.9 | 1.2 |
| 134 | $1-C_4H_8 + CH_3^{\bullet} \rightarrow C_5H_{11}^{\bullet}$ | 8.3 | 7.2 |
| 7. Molecular Reaction I | | | |
| 135 | $C_3H_8 \rightarrow C_3H_6 + H_2$ | 12.0 | 50.0 |
| 136 | $C_4H_6 + C_2H_4 \rightarrow C_6H_6 + 2H_2$ | 9.9 | 34.6 |
| 137 | $C_4H_6 + C_3H_6 \rightarrow C_7H_8 + 2H_2$ | 9.0 | 35.6 |
| 138 | $C_4H_6 + 1-C_4H_8 \rightarrow C_8H_{10} + 2H_2$ | 14.8 | 60.0 |
| 139 | $C_4H_6 + C_4H_6 \rightarrow C_8H_8 + 2H_2$ | 9.2 | 29.8 |
| 8. Molecular Reaction II 7 | | | |
| 140 | $4C_6H_6 \rightarrow 3(C_4H)_X + 9H_2$ | 15.3 | 50.7 |
| 141 | $4C_7H_8 \rightarrow 7(C_4H)_X + 12.5 H_2$ | 15.3 | 50.7 |
| 142 | $C_8H_{10} \rightarrow 2(C_4H)_X + 4H_2$ | 15.3 | 50.7 |
| 143 | $C_8H_8 \rightarrow 2(C_4H)_X + 3H_2$ | 15.3 | 50.7 |
| 144 | $2C_2H_6 \rightarrow C_3H_8 + CH_4$ | 12.5 | 65.0 |
| 145 | $C_3H_6 + C_2H_6 \rightarrow C_4H_8 + CH_4$ | 14.0 | 60.0 |
| 146 | $C_3H_8 \rightarrow C_2H_4 + CH_4$ | 10.6 | 50.0 |
| 147 | $C_3H_8 \rightarrow C_3H_6 + H_2$ | 10.7 | 51.0 |
| 148 | $2C_3H_6 \rightarrow 3C_2H_4$ | 12.8 | 64.0 |

REFERENCES

- [1] Pinter A., Tungler A., Nagy L., Vida L., Kovacs I., Kerezsi J., A Laboratory Steam-Cracking Reactor to Characterize Raw Materials, *International Journal of Chemical Reactor Engineering*, **2**, A15 (2004).
- [2] Hirato M., Yoshioka S., Matanuska Thermal Cracking of Gas Oil, Naphtha and Kerosene for Production of Light Olefins, *Hitachi Rev*, **20**, 326 (1971).
- [3] Belohlav Z., Zamostny P., Herink T., The Kinetic Model of Thermal Cracking for Olefins Production, *Chemical Engineering and Processing*, **42**, p. 461 (2003).
- [4] Ghassabzadeh H., Towfighi Darian J., Zaheri P., Experimental Study and Kinetic Modeling of Kerosene Thermal Cracking, *J. Anal. Appl. Pyrolysis*, **86**, p. 221 (2009).
- [5] Depeyre D., Flicoteaux C., Arbabzadeh F., Zabaniotou, A., Modeling of Thermal Steam Cracking of an Atmospheric Gas Oil, *Ind. Eng. Chem. Res.* **28**, p. 967 (1989).
- [6] Zahedi S., Towfighi J., Karimzadeh R., Omidkhan M., Determination of Yield Distribution in Olefin Production by Thermal Cracking of Atmospheric Gasoline, *Korean J. Chem. Eng.*, **24**, p. 681 (2008).
- [7] Keyvanloo K., Towfighi J., Sadrameli S.M., Mohamadizadeh A., Investigating the Effect of Key Factors, Their Interactions and Optimization of Naphtha Steam Cracking by Statistical Design of Experiments, *J. Anal. Appl. Pyrolysis*, **87**, p. 224 (2010).
- [8] Poustma M.L., Fundamental Reactions of Free Radicals Relevant to Pyrolysis Reactions, *J. Anal. Appl. Pyrol.*, **54**, p. 5 (2000).
- [9] Franz J.A., Camaioni D.M., Autrey T., Linehan J.C., Alnajjar M.S., Measurement of Select Radical Processes in Hydrocarbon Pyrolysis, *J. Anal. Appl. Pyrol.*, **54**, p. 37 (2000).
- [10] Safarik I., Strausz O.P., The Thermal Decomposition of Hydrocarbons. Part 3. Polycyclic n-Alkylaromatic Compounds, *Res. Chem. Intermed.*, **23**, p. 179 (1997).
- [11] Sadrameli S.M., Green A.E.S., Systematics and Modeling Representations of Naphtha Thermal Cracking for Olefin Production, *J. Anal. Appl. Pyrolysis*, **73**, p. 305 (2005).
- [12] Towfighi J., Niaei A., Karimzadeh R., Saedi G., Systematics and Modelling Representations of LPG Thermal Cracking for Olefin Production, *Korean J. Chem. Eng.*, **23**, p. 8 (2006).
- [13] Ranzi E., Dente M., Goldaniga A., Bozzano G., Faravelli T., Lumping Procedures in Detailed Kinetic Modeling of Gasification, Pyrolysis, Partial Oxidation and Combustion of Hydrocarbon Mixtures, *Progress in Energy and Combustion Science*, **27**, p. 99 (2001).
- [14] Sundaram K.M., Froment G., Modeling of Thermal Cracking Kinetics. 3. Radical Mechanisms for the Pyrolysis of Simple Paraffins, Olefins, and Their Mixtures, *Ind. Eng. Chem. Fund.*, **17**, p. 174 (1978).
- [15] Dente, M., Ranzi, E. and Goossens, A.G., Detail Prediction of Olefin Yields from Hydrocarbon Pyrolysis through a Fundamental Simulation Model (SPYRO), *Comput. Chem. Eng.*, **3**, p. 61 (1979).
- [16] Froment G., Van de Steene, B.O. and Van Damme, P., Thermal Cracking of Ethane and Ethane-Propane Mixtures, *Ind. Eng. Chem. Process Des. Dev.*, **15**, p. 495 (1976).